


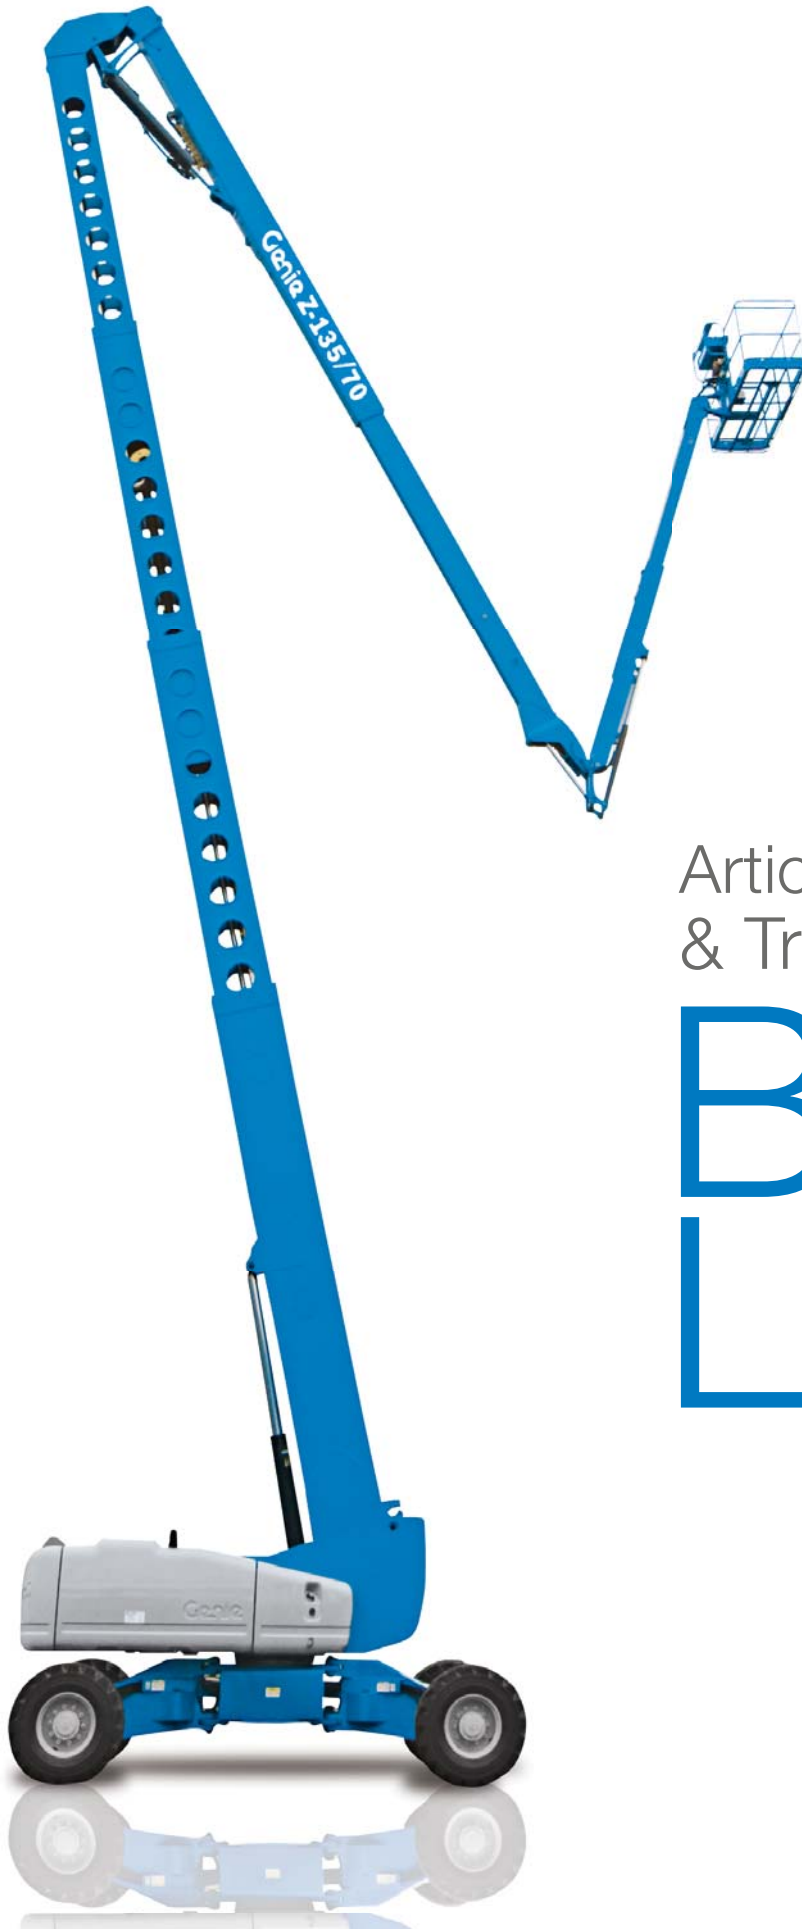

Articulating, Telescopic,
& Trailer Mounted Z™ -

Boom Lifts

Customers First Always

Partnering for Success

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships because you, our customer, are at the center of everything we do.

Since 1966, we've been developing products to solve your worksite challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

Providing Superior Value

Our commitment doesn't end with the sale. Our dedicated service teams are available 24 hours a day, 365 days a year to provide support when you need it most. Our extensive parts network ships most parts within 24 hours, too. Simply put, we're always working to help increase your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.



Setting the Standard: Terex Aerial Work Platforms (AWP)
manufactures some of the most advanced, highest-valued lift equipment in the industry. Distinctive blue Genie® lifts set the standard for performance and durability — not to mention support from people who understand your business.



Reach and Performance for Every Job

Get the reach and reliable performance you need to get the job done from the ever-growing line of Genie® articulating and telescopic boom lifts. Electric, hybrid, bi-energy or engine-powered — for indoor, outdoor or rough terrain applications — there's a Genie lift for every job.

Genie articulating Z™-booms provide the ultimate in versatility with up, out and over positioning capabilities for hard-to-access work areas. Genie telescopic S™-booms are engineered to enhance working efficiency and offer greater horizontal outreach than any other type of aerial platform. And all of our booms can be customized with a variety of options and packages to fit your individual job site needs.

Genie trailer-mounted Z-booms feature an outstanding operating envelope, making them your best value to reach jobs high and low. Both the Genie TZ-34/20 and the TZ-50 feature the exclusive Genie Automatic Leveling System™ for self-leveling on any terrain, resulting in a faster setup that gets the job started — and finished — quicker. With easy-to-tow mobility and simple pictograph controls, it's no wonder that Genie trailer-mounted Z-booms take productivity to new heights.

Genie revolutionized the industry with the first articulating boom and remains a world leader in lifts.

Narrow Access Solutions

Drive through standard doorways, work close to buildings or around obstacles, and access overhead work from aisles and other congested areas. It's all possible with Genie® narrow electric lifts. From tight turning to a rotating platform, they're designed with features that make it easy to maneuver precisely where you need to work. Working heights range from 35 ft 2 in (10.87 m) to 46 ft 5 in (14.32 m).



Exceptional Control

Proportional lift and drive controls allow precise positioning of the boom and smooth drive performance. For added flexibility, the energy-saving Z™-40/23N control system allows efficient operation of multiple functions at the same time — which allows you to get where you need to go faster.



Tight Access Maneuverability

The electric boom line includes a variety of narrow models ideal for the tightest, most confined work areas. These compact designs feature a tight turning radius with zero tailswing on most models for easy maneuvering through narrow aisles and standard doors.

The Genie Z-40/23N models are the first in the industry to feature the efficient AC drive system.

Precise Positioning

The self-leveling platform rotates 90° to either side, while the jib boom moves 130° to 139° vertically, depending on the model. The 4 ft (1.22 m) jib moves horizontally 180° on rotating jib (RJ) models for extra working range. Proportional controls allow you to control the speed of each function and make smooth, precise adjustments in tight areas.



Reliable Electric Drive Systems

Several models feature a 48V DC electric drive system, which can be freely used in areas where quiet, emission-free operation is important. The Z™-40/23N models are the first in the industry to feature the AC drive system, which combines DC batteries with 3-phase AC drive motors for quiet, more energy efficient operation and longer battery life. This advanced system yields better drive speed and gradeability, and the drive wheels work independently for excellent traction control.



Narrow Models Available

[Z-30/20N](#)[Z-30/20N RJ](#)[Z-34/22N](#)[Z-40/23N](#)[Z-40/23N RJ](#)

DC Power Options for Demanding Jobs

Our efficient DC machines offer quiet, emission-free operation in the most sensitive work environments. For industrial applications where the machine must be driven significant distances, the Genie® hybrid, bi-energy system combines the benefits of a 48V DC machine with the versatility of a diesel-powered generator. These units handle challenging jobs all day long, giving you the power to get where you need to go quickly and easily with soft-riding pneumatic tires, excellent maneuverability and zero tailswing. Optional non-marking air- and foam-filled tires also make these models great for industrial applications. Working heights range from 40 ft 6 in (12.52 m) to 51 ft 9 in (15.94 m).

Access and Maneuverability

These models offer ideal up and over reach in confined work spaces. Zero tailswing means there's no need to reposition the lift when rotating the turntable in crowded areas. And the compact size suits applications where a lower machine weight is needed.



Multiple power options meet the demands of a variety of indoor and outdoor applications.



Precise Positioning and Control

The self-leveling platform rotates 90° to either side on non-jib models. On jib models, the jib moves 135° to 139° vertically, depending on the model, and rotates 80° to either side. Proportional lift and drive controls allow you to determine the speed of each function and make smooth, precise movements to position yourself exactly where you need to work.



On-Board Battery Charging

The direct electric, 48V drive system provides outstanding battery life between charges. For overnight recharging, the on-board 30 amp universal smart charger automatically adjusts to the input AC voltage and frequency and shuts down when the battery pack is fully charged.



Power When You Need It

Lift, maneuver and travel all day with the hybrid drive, bi-energy model. The on-board diesel-powered generator acts like a 100 amp battery charger to provide enough electrical power to operate all boom functions, even when the batteries are fully discharged.

DC Models available

Z-34/22 DC

Z-34/22 BI-ENERGY

Z-45/25 DC

Z-45/25 BI-ENERGY

Z-45/25J DC

Z-45/25J BI-ENERGY

Excellent Positioning Meets Superior Handling

Genie® engine-powered articulating Z™-booms provide lifting versatility with a stunning combination of up, out and over positioning capabilities and extensive outreach. They also offer high ground clearance, two- or four-wheel drive options and rough terrain features for easy travel over irregular ground. Ideal for outdoor construction and industrial applications, these units have working heights between 40 ft 6 in (12.52 m) and 66 ft 4 in (20.39 m) and reach out a maximum of 22 ft 3 in (6.78 m) to 36 ft 3 in (11.05 m).



Performance and Terrainability

Get the job done faster and more efficiently with a powerful combination of speed and gradeability. The full-time positive drive traction system and active oscillating axle work together based on ground conditions to help keep the machine moving without losing traction on rough terrain (oscillating axle optional on some models. Not available on Z-34/22 IC).



Job Site Access

The Z-boom design provides lifting versatility with “up and over” positioning and excellent outreach. A tight turning radius and zero tailswing allow unmatched maneuverability in confined work areas.

Genie was the first in the industry to introduce the rotating jib.


Choice and Versatility

Choose from two- and four-wheel drive, engine, platform, axle and tire options for the best configuration to meet your specific job site requirements. Need extra-rugged performance? Rough terrain models are excellent for traveling (stowed) over irregular or bumpy ground to a worksite.



Positioning and Capacity

Powered rotation lets you move the platform exactly where you need it, while the self-leveling feature keeps the platform level through the entire range of motion. 500 lb (227 kg) capacity is standard, easily handling up to two operators and tools. For enhanced platform positioning or to gain additional reach, choose models featuring a 4, 5, or 6 ft (1.22, 1.52, or 1.83 m) jib.

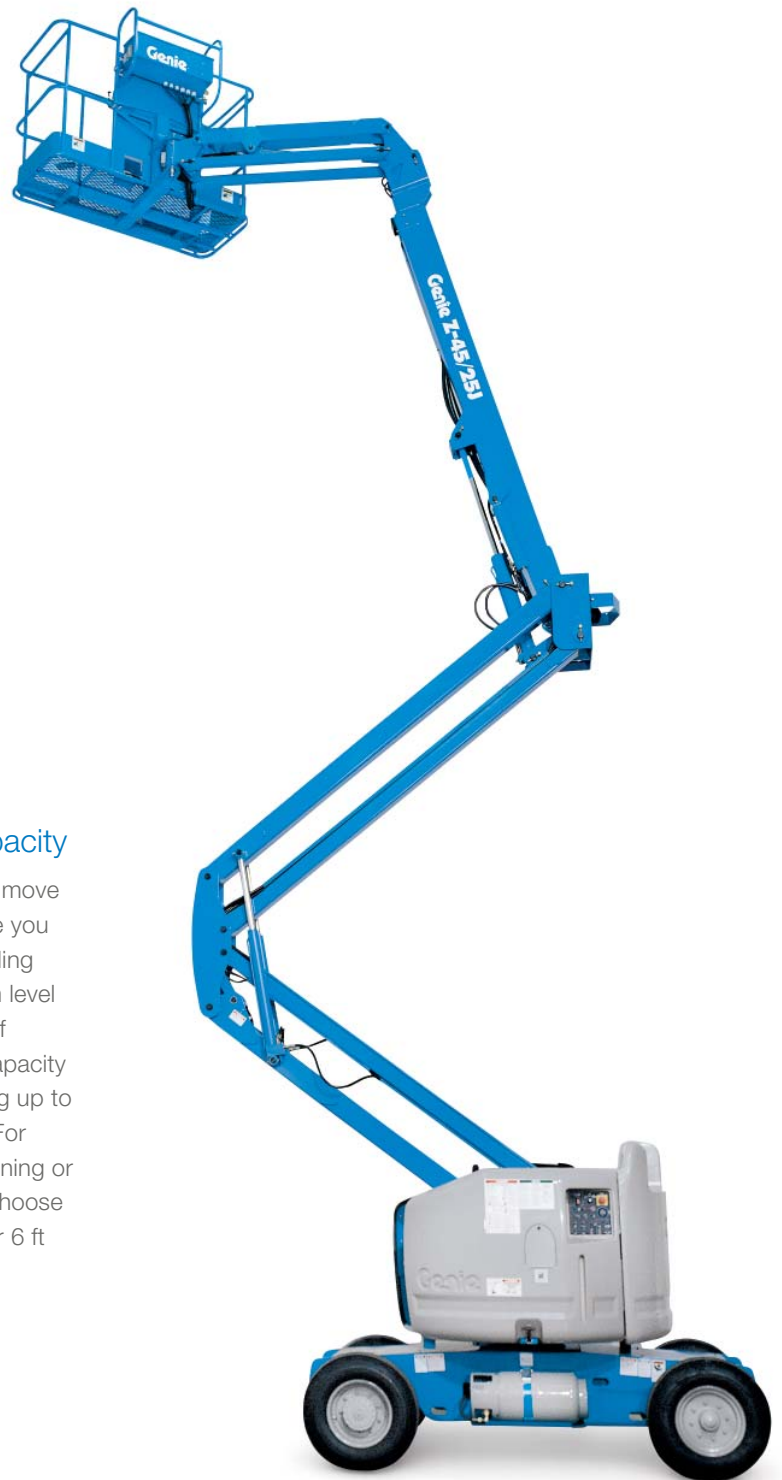

Rough Terrain Models Available

Z™-34/22 IC

Z-45/25 RT

Z-45/25J RT

Z-60/34

Ultimate Lifting Versatility

The largest of the Genie® engine-powered articulating Z™-booms, these models have outstanding range of motion — with features like a telescoping jib and 360° continuous turntable rotation. Powerful engine options, plus four-wheel drive and four-wheel steer take you to the work area efficiently, even over rough terrain. And the Z-boom design provides excellent up and over positioning from 29 ft (8.83 m) on the Z-80/60 to 75 ft 6 in (23.01 m) on the Z-135/70.



Exclusive XChassis™ Axle Design

The XChassis expanding axle revolutionizes the mechanism for extending and retracting the axles to and from the stowed position. It combines outstanding stability with the flexibility for easy transport at a stowed machine width of just 8 ft 1 in (2.46 m) on the Z-135/70. The Z-80/60 offers fixed-width axles for convenient transport.

Advanced Controls

The ALC 1000 electronic control system provides menu-based adjustments for machine and component calibration as well as on-screen multi-language system diagnostics.



Traction for Irregular Terrain

Four-wheel drive with full-time positive traction handles rough ground conditions to enhance the smoothness of the ride. The full time active oscillating axle on the Z-80/60 increases wheel contact on irregular terrain. Four-wheel steer comes standard on the Z-135/70, with front wheel, rear wheel, crab and coordinated steer options available to provide additional maneuverability.

Powerful Engine Options

Quiet diesel engines like the turbocharged Deutz option give you more power and increased performance at higher altitudes, as well as plenty of torque for superior gradeability and terrainability. Dual fuel options are available on the Z-80/60.

The Genie Jib-Extend™ telescoping jib extends from 12 to 20 ft (3.66 to 6.10 m) - providing outstanding reach and up-and-over clearance.

Outstanding Reach and Up-and-Over Clearance


The Jib-Extend™ telescoping jib on the Z™-135/70 model extends from 12 to 20 ft (3.66 to 6.10 m) and provides a 110° vertical range of motion to reach “up, over and in” applications inaccessible by a traditional jib. The Z-80/60 has an innovative reverse-articulating secondary boom for 29 ft (8.83 m) of up and over reach with zero front arm swing.

Genie® Fast Mast™ System

The Genie Fast Mast system allows you to lower the platform to the ground without having to lower the secondary boom — so operators can ascend and descend quickly and efficiently. In addition, this timesaving design raises both primary and secondary booms simultaneously to help the operator reach full elevation fast and increase productivity.

Quick, Flexible Positioning

Both models have 360° continuous rotation turntables for fast, easy positioning. The platform also hydraulically rotates a full 160° and stays level throughout the entire range of motion. Choose 6- or 8-ft (1.83 or 2.44 m) front-entry platforms with 500 to 600 lbs (227 to 272 kg) of capacity for operators and tools.

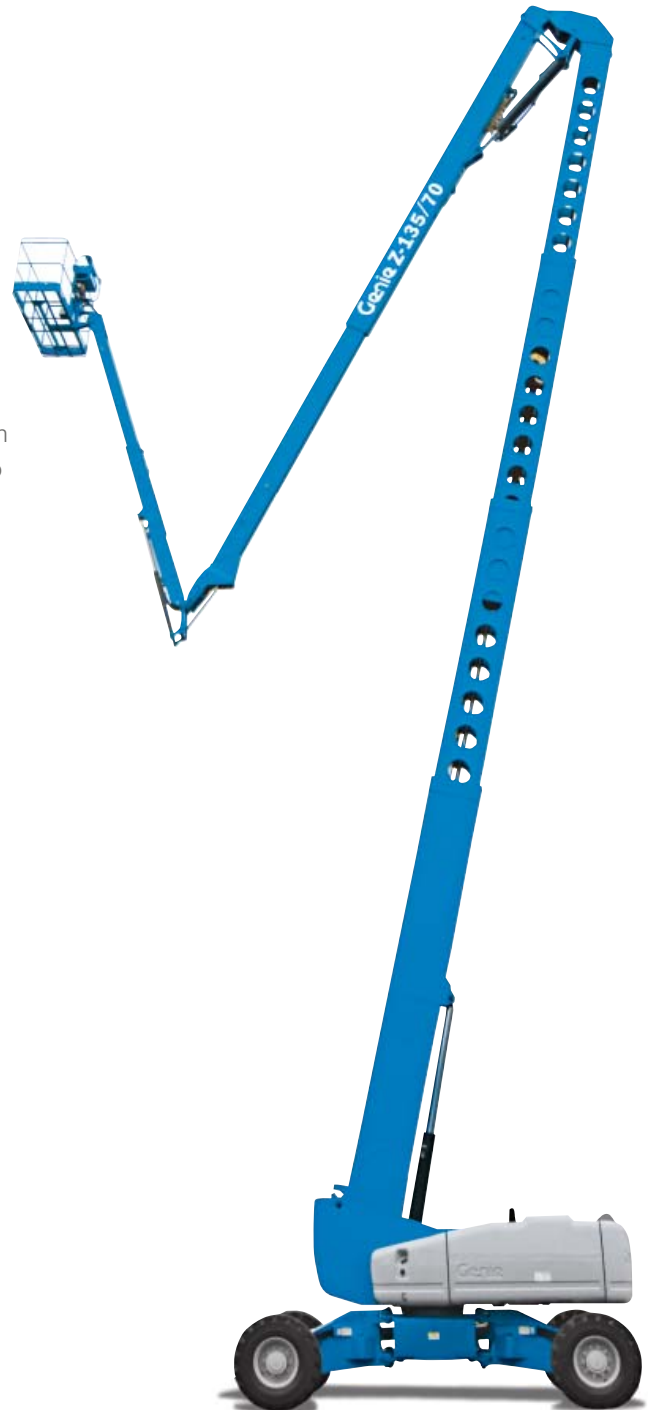


Rough Terrain Models Available

Z-80/60 | **Z-135/70**

Outstanding Horizontal Outreach

Telescopic booms offer greater horizontal outreach than any other type of aerial platform — perfect for areas with limited access in construction and industrial applications. Genie® telescopic S™-booms are also designed for productivity with the traction and drive speed you need to get around the job site and to the work area. These models reach out horizontally between 31 ft 8 in (9.65 m) and 80 ft (24.38 m), with working heights of 46 ft (14.20 m) to 131 ft (40.15 m).

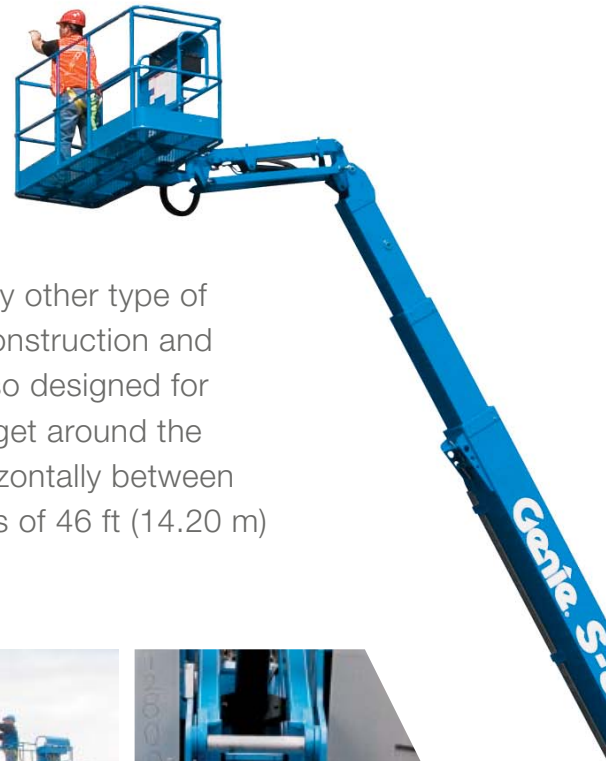

Superior Reach and Positioning

Exceptional horizontal outreach and a rotating, self-leveling platform allow precise positioning exactly where you need to work. For added flexibility, the articulating jib boom option gives you an extra 5 ft (1.52 m) of horizontal or vertical reach and 135° of working range.



Outstanding Terrainability

A revolutionary patented system automatically senses the terrain and adjusts the axle position based on ground conditions. Positive traction drive maintains equal power to all drive wheels, even if one wheel loses traction in mud, snow or sand. And two- or four-wheel drive options make it easy to drive up loading ramps for transport.

Our revolutionary patented active oscillation system automatically senses the terrain and adjusts the axle position based on ground conditions.



Maximize Year-Round Productivity

Featuring a fixed, four-point track system, the Genie® TraX™ models allow operators to maneuver in a diverse range of conditions. The rubber tracks provide increased flotation and traction for traveling in mud, sand, snow, gravel, in wet or rough terrain environments, and even on sensitive outdoor surfaces. Because the Trax models are fixed with four independent tracks, they steer like a wheeled machine to allow maneuvering close to walls and foundations. Plus, each track flexes 23° up and down for a smooth ride over undulating terrain and while loading on trailers. Thanks to a machine width of 8 ft 6 in, Trax models can be transported without over-width permits. Trax system available on S™-40, S-45, S-60, and S-65.



Great for Tight Spaces

The 360° continuous rotation turntable rotates full circle for quick and flexible positioning. Minimal tailswing allows you to maneuver in tight work spaces. Plus, fixed width axles eliminate the need for additional set up by an operator after unloading from a transport trailer.

Dual-Fuel Engine Options

Dual-fuel options are available for reliable, on-demand performance with the flexibility for indoor/outdoor applications. A switch on the control panels allows instant choice of gasoline or LPG operation.

The Versatility of Dual Capacity

Four Genie telescopic boom models provide greater platform capacity within a restricted outreach as a standard feature. The Genie S-60X, S-60XC, S-60 TraX, and S-80X feature restricted platform capacities up to 1,250 lbs, the highest in the industry. By increasing the work platform capacity, the maximum number of occupants has increased to three, thereby increasing job productivity. Outreach is automatically restricted by the operator by selecting the appropriate platform capacity. User selected outreach is built in to encourage safe usage.



Engine-Powered Models Available

S-40	S-40 TraX	S-45	S-45 TraX	S-60X	S-60 TraX	S-60 XC	S-65	S-65 TraX	S-80X	S-85
------	-----------	------	-----------	-------	-----------	---------	------	-----------	-------	------

Power and Terrainability

Genie® Super Booms™ lifts combine maximum reach with exceptional maneuverability. They feature rugged diesel engine options, four-wheel drive and four-wheel steer capabilities, and foam-filled rough terrain tires to quickly position you where you need to work. With horizontal outreach of 80 ft (24.38 m) and working heights up to 131 ft 2 in (40.15 m), these machines set performance and operation standards for other booms on the market.

Great for Tight Spaces

The 360° continuous rotation turntable swings full circle for quick and flexible positioning. Reduced tailswing allows you to maneuver in tight workspaces.

Diesel Engine Options

These models feature quiet diesel engines for more power and increased performance, even at high altitudes. Choose from two diesel engine options on these models: Deutz 74 hp (55 kW) or Perkins 83 hp (62 kW).



The horizontal outreach of the Genie Super Boom line is among the industry's best at 75 to 80 ft (22.86 to 24.38 m), depending on the model.



Precise Platform Positioning

Standard 8 ft (2.44 m) front-entry platforms can be rotated to exactly where you need to work and are self-leveling throughout the range of motion.

Extra Working Range

The out-and-up articulating jib boom option gives you an additional 5 ft (1.52 m) of horizontal reach and height plus 135° of working range.

Outstanding Terrainability

Models S™-105 and S™-125 come standard with four-wheel drive and four-wheel steer to meet the demands of rugged outdoor use. They also feature rough-terrain foam-filled tires for excellent terrainability, traction and durability. Extendable axles allow you to extend or retract axles from the platform while driving for stability, ease of operation and convenient transport.

Engine-Powered Models Available

S-105 | **S-125**

Reach Up Reach Out

The Genie® TZ™-34/20 has an outstanding working envelope and intuitive controls that allow operators to efficiently reach where they need to be. With a working height of up to 40 ft (12.36 m), an outreach of 18 ft 4 in (5.59 m) and 16 ft 1 in (4.90 m) of “up and over” capability, the TZ™-34/20 provides excellent versatility for a variety of jobs.



Easy Transport and Setup

With a variety of hitch coupler options, the TZ-34/20 is easily towed behind a pickup or SUV. Hydraulic outriggers with automatic self-leveling allow machine setup in as little as 30 seconds, so you spend less time setting up and more time working.



Though rugged and heavy-duty, the TZ-34/20 is lightweight enough to use on lawns, slate or gymnasium floors. Simply put, it meets the challenges of just about any working environment.



Easy-to-Use Controls

Both ground and platform controls feature an easy-to-use pictograph system making it quick and easy to get right to work.



Designed For Serviceability


Easy setup and operation aren't the only efficient benefits of the TZ™-34/20. The machine is built to make service simple, including easy access to batteries. Simply release the clamp and remove the cover.



Built to Work

Durability is built in. The rigid chassis has a heavy-duty base and robust outriggers, making it the best solution for large and small contractors, maintenance crews, painting contractors and rental yards.

Industry-Leading Working Range

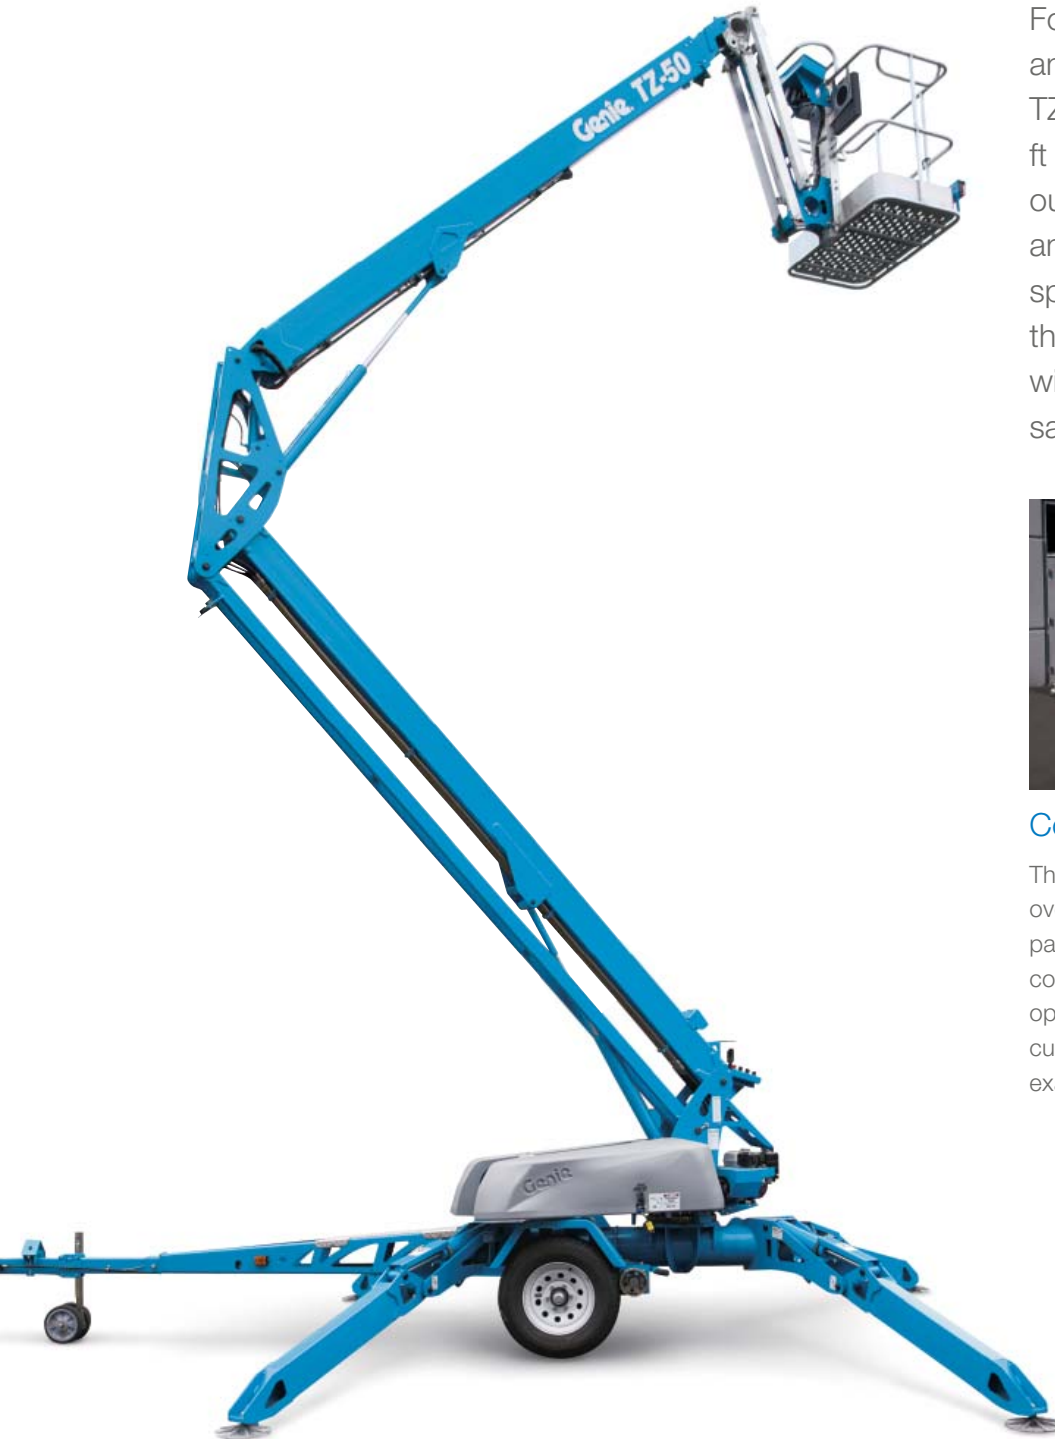

For the ultimate in towable reach and range, you can't beat the Genie® TZ™-50. With a working height of 55 ft 6 in (17.09 m), 29 ft 2 in (8.89 m) of outreach and 22 ft (6.71 m) of “up and over” clearance, the numbers speak volumes about the versatility of the TZ-50. The fact that it's a favorite with contractors and rental yards says even more.



Compact Narrow Versatility

The TZ-50 offers outstanding “up, out and over” capabilities in a compact, lightweight package that is easy to maneuver in congested work areas. An assortment of options and accessories means you can customize the versatile TZ-50 to meet your exact needs.

The TZ-50 provides high value in high reach lift equipment.



Mobility

The TZ™-50 goes where you need it with a variety of hitch coupler options for easy towing behind a pickup or SUV — and heavy-duty jockey wheels for precise positioning during setup. The optional Drive and Set™ feature allows you to drive the TZ-50 to where you need to work.



Flexible Working Range

Along with the primary jib boom, the articulating jib boom provides an additional 4 ft 1 in (1.25 m) of horizontal reach and 135° of working range to position the platform above or below horizontal.



Simple Leveling and Controls

Our patent-pending Automatic Leveling System™ allows the operator to hydraulically deploy the outriggers and level the machine to one degree in all directions. Plus, easy-to-use pictographs on both ground and platform controls offer simple, intuitive operation.



Designed For Serviceability

From transport and setup to operation and service, the TZ-50 keeps it simple, including easy access to batteries. Simply release the clamp and remove the cover.

Customize Your Boom for Specific Job Site Needs

Platforms

Choose from 6 and 8 ft (1.83 and 2.44 m) steel platforms. Other options include a swing gate that replaces the standard sliding mid-rail for walk-in access to the platform, an auxiliary top rail, and a tri-entry configuration. Available on the 8 ft (2.44 m) platform, the tri-entry option provides sliding midrail entries on both ends of the platform as well as the front of the platform.



Auxiliary Top Railing



Pipe Cradle

Platform accessories include:

- Auxiliary Top Railing
- Plate Glass and Panel Cradle Package
- Platform Control Box Cover
- Air Line to Platform
- Fluorescent Tube Caddy
- Welder Leads
- Travel Alarms and Flashing Beacon
- Half-Height Mesh
- Pipe Cradle
- Platform Work Lights
- Tool Tray
- Rocker Steer Joystick

Power

Welder Package

The ARC Pro 275 heavy-duty welder package is powered by a hydraulically driven 208V AC 3-phase generator driven by a closed-loop hydraulic system. It produces 12,500 continuous and 13,500 peak watts. It is available as a Full Welder Package, including a high quality Lincoln Welder, or as a Welder-Ready Package, without the Lincoln Welder.

Generator

Hydraulic-driven generator option supplies power to the platform for operating tools without relying on an outside power source and extension cords.

800 Watt power Inverter*

The inverter converts 48V DC battery pack power to 120V AC (60 Hz) power to allow the operator to utilize a variety of power tools on the platform while elevated (for DC machines only.)



Generator



Welder Package

Power system options* include:

- Battery Charge Indicator
- Additional LPG Tank and/or LPG Tank with Carrier
- Second Battery
- Diesel Catalytic Scrubber Muffler
- Hydraulic Oil Cooler
- Low Voltage Interrupt with Battery Charge Indicator
- Cold Weather Package



800 Watt Power Inverter

*Availability of accessories and options varies depending on model and/or country standards.

Drive, Steer And Traction

Choose from two- and four-wheel drive and two- and four-wheel steer options (four-wheel steer not available on all models).

Tire Options

Air-filled: Rough terrain, high flotation, industrial and sealant treated

Foam-filled: Rough terrain and industrial

Non-marking: Standard on solid rubber models (Z™-30, Z™-34 and Z™-40 families). Optional on most air or foam-filled models (except high flotation).

Job Site Protection

Hostile Environment Package

The Basic kit includes cylinder bellows, boom wiper seals and a control box cover to protect the most critical boom and chassis areas from loose job site debris. The Deluxe kit adds a center turntable shield, air intake pre-cleaner, cable track protection, and covers for vents and openings, for added protection from loose job site debris in applications such as sandblasting or painting.

Aircraft Protection System

The Aircraft Protection System includes a motion-shutoff, proximity-sensing mechanism under the platform to help protect sensitive surfaces from damage. High-visibility, dense foam padding on the railings provides additional protection. Platform capacity is adjusted to 440 lbs (200 kg).

Engine

Engine Options

Gasoline/LPG engine options include Ford, Kubota and Continental. Diesel engine options include Deutz, Perkins or Kubota. (Engine options depend on model.)

Cold Weather Package

Components vary depending on engine, but include synthetic engine oil, 110V battery blanket, platform control board heater, and oversized foot switch cover. See sales representative for additional details.


Additional Options

Tow Package


Allows the machine to be towed by another vehicle (the machine does not have use of its brakes when being towed and can only be towed at very low speeds). This package includes a tow bar, steering float valve and tow bar storage bracket.



Solid Rubber Tires

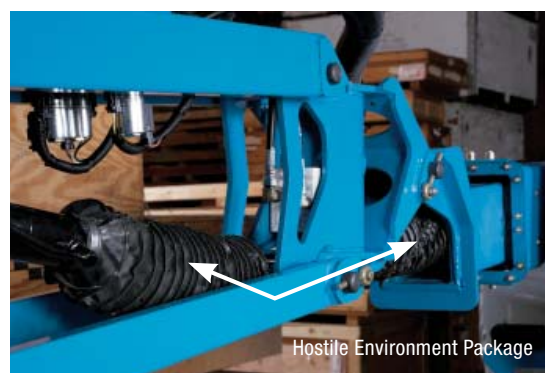

Hostile Environment Package

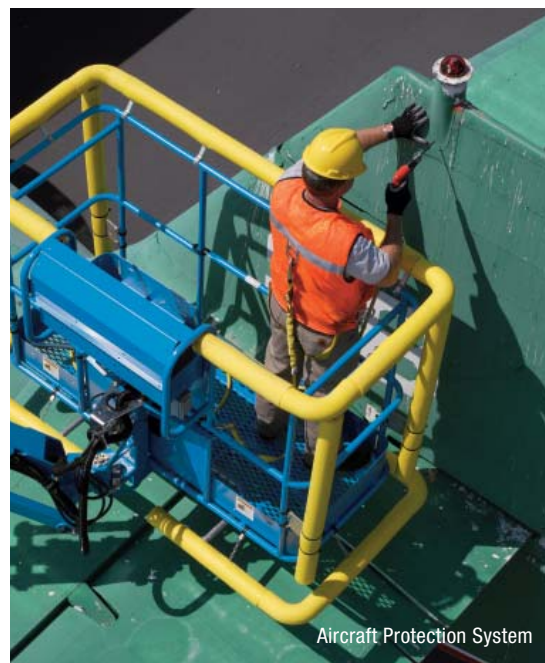

Aircraft Protection System

Options And Accessories

	TZ™-34/20	TZ™-50
Platform Options		
PLATFORM ROTATION	•	•
LED BRAKE LIGHTS	•	•
Power Options		
DC	•	•
HYBRID HONDA CHARGING SYSTEM		•
Drive Options		
DRIVE AND SET OPTION (ANSI/CSA/AUS)		•
DRIVE ONLY (CE)		•
Coupler Options		
COMBINATION HITCH AND ADJUSTABLE HEIGHT COUPLER SYSTEM	•	•
2 IN (5.08 CM) BALL COUPLER	•	•
2.31 IN (5.87 CM) BALL COUPLER	•	•
2.5 IN (6.35 CM) I.D. PINTLE RING COUPLER – US	•	•
CLEVIS COUPLER – US	•	•
Accessories		
TOOL TRAY	•	•
FLUORESCENT TUBE CADDY	•	•
BATTERY CHARGE INDICATOR (BCI)	•	•
OPERATIONAL WARNING LIGHT PACKAGE (FLASHING BEACONS)	•	•
NON-MARKING OUTRIGGER FOOTPADS	•	•
SPARE TIRE	•	•
WHEEL CHOCKS	•	•
HORN	•	•
LADDER		•
BICYCLE GUARD (CE)	•	•





Optional Platform Rotation

A manual rotate mechanism allows the operator to rotate the TZ™-34/20 platform a total of 90°, 45° in either direction. The hydraulic rotation on the TZ-50 provides a 160° of platform rotation.



Dual Flashing Beacons

Orange flashing lights warn workers when lift is moving or in operation.



Hitch Coupler Options

Choose the type of hitch that best meets your needs from a variety of options.

Options And Accessories



Drive, Set, Lift

Choose the Drive and Set™ option to have ultimate flexibility in positioning your Genie® TZ™-50 exactly where you need it. When the platform is in the fully lowered position, you can drive the unit to the area where you need to work, deploy the outriggers and then raise the platform to the level needed. These quick, efficient operations are designed to increase your productivity on the job. (ANSI/CSA/AUS only)



Hybrid DC/Gas Engine


Allows machine to charge in remote locations.

Specifications

Trailer-Mounted Z™-Boom Lifts

MODEL	WORKING HEIGHT		HORIZONTAL REACH		LIFT CAPACITY*							
					STANDARD PLATFORM				WITH OPTIONAL PLATFORM ROTATION			
					ANSI/CSA		CE/AUS		ANSI/CSA		CE/AUS	
	US	METRIC	US	METRIC	US	METRIC	US	METRIC	US	METRIC	US	METRIC
TRAILER-MOUNTED Z-BOOMS												
TZ-34/20	40 ft	12.36 m	18 ft 4 in	5.59 m	500 lbs	227 kg	440 lbs	200 kg	460 lbs	209 kg	400 lbs	181 kg
TZ-50	55 ft 6 in	17.09 m	29 ft 2 in	8.89 m	500 lbs	227 kg	440 lbs	200 kg	500 lbs	227 kg	440 lbs	200 kg

*Lift capacity varies depending on options and country standards.

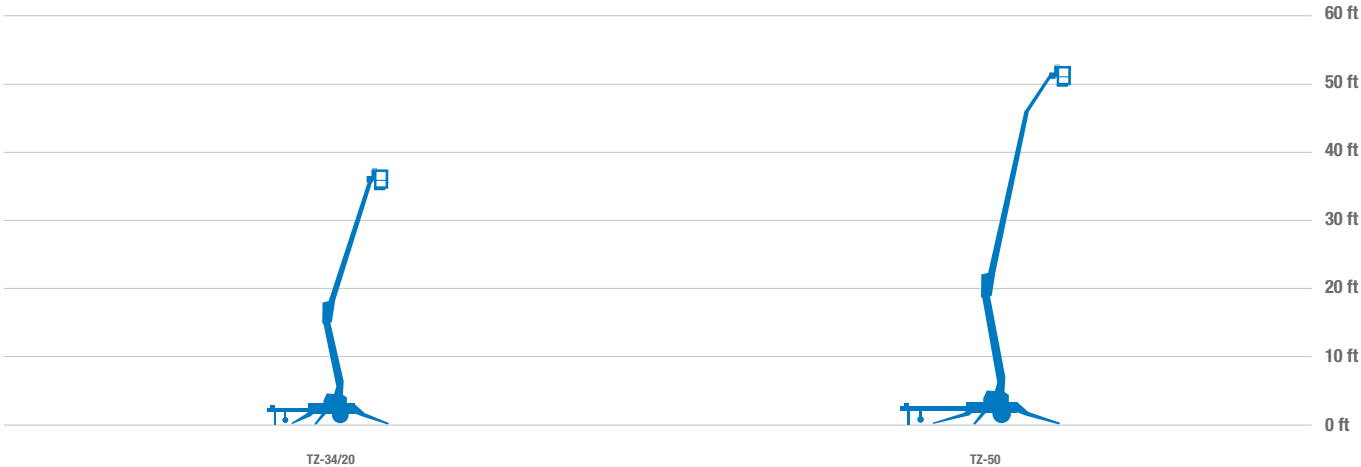


Specifications

Articulating Z™-Boom Lifts

MODEL	WORKING HEIGHT		WIDTH		HORIZONTAL REACH		UP & OVER CLEARANCE		LIFT CAPACITY	
	US	METRIC	US	METRIC	US	METRIC	US	METRIC	US	METRIC
Narrow Articulating Z™-Boom Lifts										
Z-30/20N	36 ft	11.14 m	3 ft 11 in	1.19 m	21 ft 5 in	6.53 m	12 ft 8 in	3.86 m	500 lbs	227 kg
Z-30/20N RJ	35 ft 2 in	10.89 m	3 ft 11 in	1.19 m	20 ft 6 in	6.25 m	12 ft 8 in	3.86 m	500 lbs	227 kg
Z-34/22N	40 ft 6 in	12.52 m	4 ft 10 in	1.47 m	22 ft 3 in	6.78 m	15 ft 2 in	4.62 m	500 lbs	227 kg
Z-40/23N	46 ft 5 in	14.32 m	4 ft 11 in	1.50 m	22 ft 8 in	6.91 m	21 ft 3 in	6.48 m	500 lbs	227 kg
Z-40/23N RJ	46 ft 5 in	14.32 m	4 ft 11 in	1.50 m	22 ft 8 in	6.91 m	21 ft 3 in	6.48 m	500 lbs	227 kg
DC And Bi-Energy Articulating Z™-Boom Lifts										
Z-34/22 DC	40 ft 6 in	12.52 m	5 ft 8 in	1.73 m	22 ft 3 in	6.78 m	15 ft	4.57 m	500 lbs	227 kg
Z-34/22 BI-ENERGY	40 ft 6 in	12.52 m	5 ft 8 in	1.73 m	22 ft 3 in	6.78 m	15 ft	4.57 m	500 lbs	227 kg
Z-45/25 DC	51 ft 6 in	15.87 m	5 ft 10.3 in	1.79 m	25 ft	7.62 m	23 ft 1 in	7.04 m	500 lbs	227 kg
Z-45/25J DC	51 ft 8 in	15.92 m	5 ft 10.3 in	1.79 m	25 ft 1 in	7.65 m	22 ft 1 in	6.73 m	500 lbs	227 kg
Z-45/25 BI-ENERGY	51 ft 6 in	15.87 m	5 ft 10.3 in	1.79 m	25 ft	7.62 m	23 ft 1 in	7.04 m	500 lbs	227 kg
Z-45/25J BI-ENERGY	51 ft 8 in	15.92 m	5 ft 10.3 in	1.79 m	25 ft 1 in	7.65 m	22 ft 1 in	6.73 m	500 lbs	227 kg
Engine-Powered Articulating Z™-Boom Lifts										
Z-34/22 IC (2 WD)	40 ft 6 in	12.52 m	5 ft 8 in	1.73 m	22 ft 3 in	6.78 m	14 ft 11 in	4.55 m	500 lbs	227 kg
Z-34/22 IC (4 WD)	40 ft 10 in	12.62 m	6 ft 1 in	1.85 m	22 ft 3 in	6.78 m	15 ft	4.57 m	500 lbs	227 kg
Z-45/25 RT	51 ft 11 in	16.00 m	7 ft 6 in	2.29 m	25 ft	7.62 m	23 ft 6 in	7.16 m	500 lbs	227 kg
Z-45/25J RT	52 ft 2 in	16.07 m	7 ft 6 in	2.29 m	25 ft 1 in	7.65 m	23 ft 6 in	7.16 m	500 lbs	227 kg
Z-60/34	66 ft 4 in	20.39 m	8 ft 1 in	2.46 m	36 ft 3 in	11.05 m	27 ft	8.23 m	500 lbs	227 kg
Z-80/60	84 ft	25.77 m	8 ft 2 in	2.49 m	60 ft	18.29 m	29 ft	8.83 m	500 lbs	227 kg
Z-135/70	141 ft	43.15 m	8 ft 1 in*	2.46 m*	69 ft 9 in	21.26 m	75 ft 6 in	23.01 m	600 lbs	272 kg

*Axles retracted

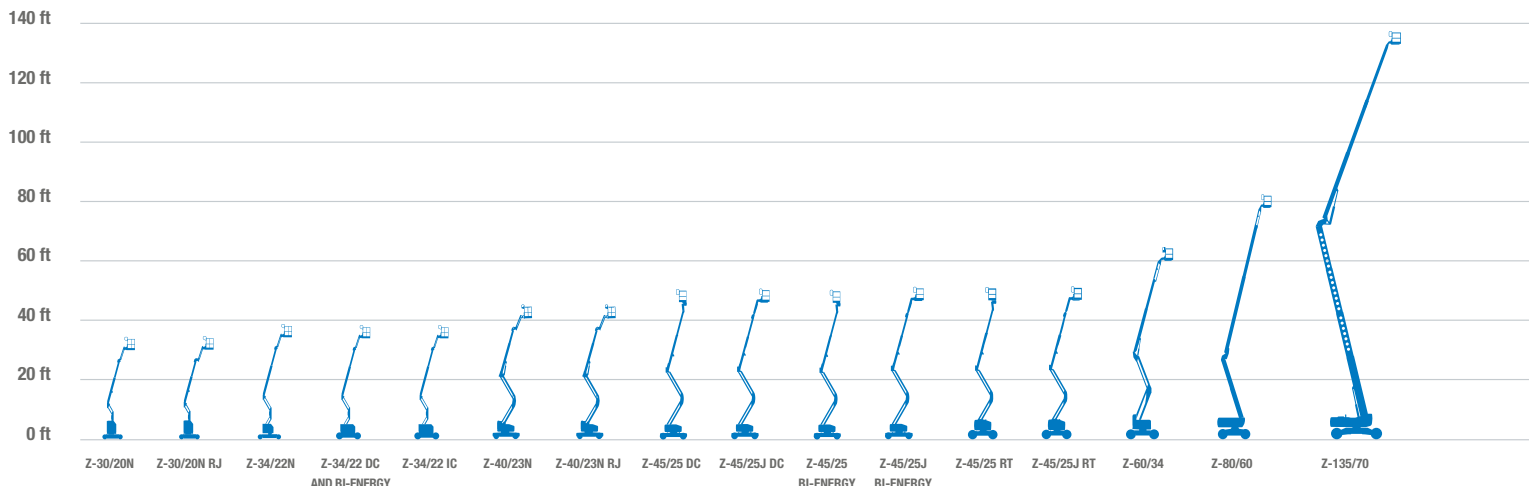


Specifications

Telescopic S™-Boom Lifts

MODEL	WORKING HEIGHT		WIDTH		HORIZONTAL REACH		LIFT CAPACITY	
	US	METRIC	US	METRIC	US	METRIC	US	METRIC
Stick Telescopic S™-Boom Lifts								
S-40	46 ft	14.20 m	7 ft 6 in	2.30 m	31 ft 8 in	9.65 m	500 lbs	227 kg
S-40 TRAX	46 ft	14.20 m	7 ft 6 in	2.30 m	31 ft 8 in	9.65 m	500 lbs	227 kg
S-45	51 ft	15.72 m	7 ft 6 in	2.30 m	36 ft 8 in	11.18 m	500 lbs	227 kg
S-45 TRAX	51 ft	15.72 m	7 ft 6 in	2.30 m	36 ft 8 in	11.18 m	500 lbs	227 kg
S-60X	66 ft	20.30 m	8 ft 2 in	2.49 m	50 ft 10 in	15.48 m	500/1000 lbs**	227/454 kg**
S-60 TRAX	66 ft 2 in	20.34 m	8 ft 6 in	2.59 m	50 ft 10 in	15.48 m	660/1100 lbs**	299/499 kg**
S-60 XC	64 ft 4 in	19.78 m	8 ft 2 in	2.49 m	50 ft 10 in	15.48 m	750/1,250 lbs**	340/567 kg**
S-65	71 ft	21.80 m	8 ft 2 in	2.49 m	56 ft 2 in	17.10 m	500 lbs	227 kg
S-65 TRAX	71 ft 2 in	21.86 m	8 ft 6 in	2.59 m	56 ft 2 in	17.10 m	500 lbs	227 kg
S-80X	86 ft	26.20 m	8 ft 2 in	2.50 m	71 ft 6 in	21.80 m	500/1000 lbs**	227/454 kg**
S-85	91 ft	27.70 m	8 ft 2 in	2.50 m	76 ft 6 in	23.30 m	500 lbs	227 kg
Super Telescopic S™-Boom Lifts								
S-105	111 ft	34.00 m	8 ft 2 in*	2.49 m*	80 ft	24.38 m	500 lbs	227 kg
S-125	131 ft 2 in	40.15 m	8 ft 2 in*	2.49 m*	80 ft	24.38 m	500 lbs	227 kg

* Axles retracted

** Maximum outreach zone / maximum capacity zone

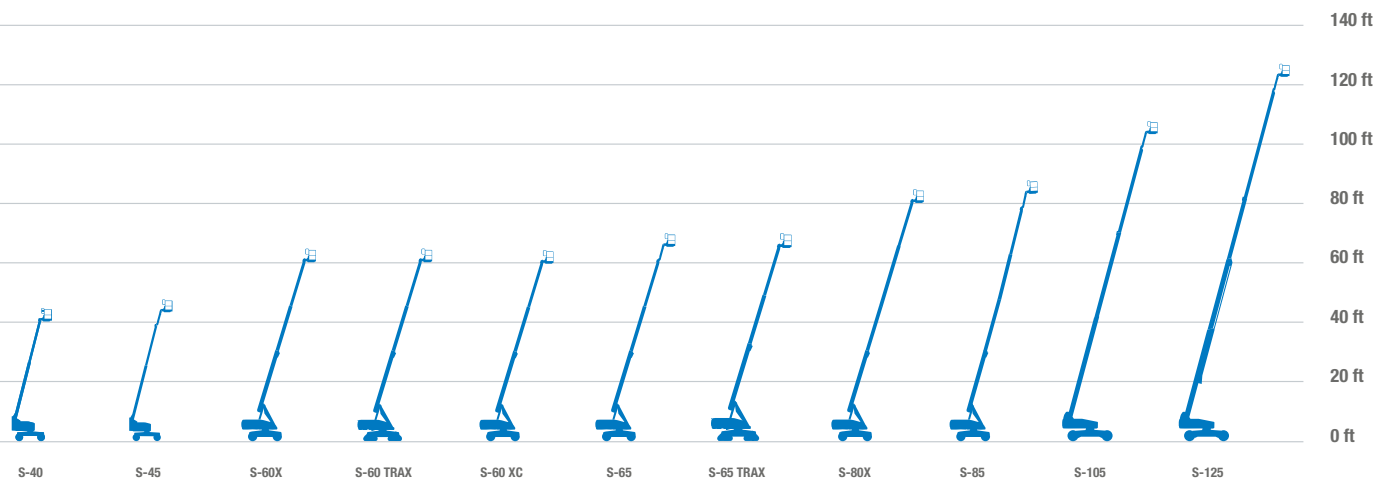



18340 NE 76th Street, P.O. Box 97030, Redmond, Washington 98073-9730

Telephone **+1 (425) 881-1800** • Toll Free in USA/Canada **+1 (800) 536-1800** • Fax +1 (425) 883-3475

www.genielift.com

Worldwide Manufacturing And Distribution

Australia • Brazil • Caribbean • Central America • China • France • Germany • Italy • Japan • Korea • Mexico
Southeast Asia • Spain • Sweden • United Arab Emirates • United Kingdom • United States

Effective Date: February, 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2012 Terex Corporation. GPB 3K 0109M . Part No. 109301.



GPB109301