

Specifications

Model	GTH™-844	
Measurements	US	Metric
Maximum lift height	43 ft 10 in	13.36 m
Maximum forward reach	28 ft 2 in	8.59 m
Reach at maximum height	2 ft 1 in	0.64 m
A Height, stowed	7 ft 10 in	2.39 m
B Length, stowed (without forks)	20 ft 3 in	6.35 m
Width	7 ft 11 in	2.41 m
C Wheelbase	11 ft 4 in	3.45 m
D Ground clearance, center	1 ft 3 in	0.38 m
E Ground clearance, axle	1 ft 5 in	0.43 m
Fork cross section	2 x 4 in	51 x 101 mm

Productivity

Maximum lift capacity	8,000 lbs	3,629 kg
Lift capacity at maximum height	6,000 lbs	2,722 kg
Lift capacity at maximum reach	2,000 lbs	907 kg
Drive speed	17 mph	27.4 km/h
Boom up/down	13/10 seconds	13/10 seconds
Boom extend/retract	14/9 seconds	14/9 seconds
Draw bar pull	21,000 lbs	9,525 kg
Turning radius, outside (4WS)	13 ft 9 in	4.19 m
Auxiliary hydraulic flow	2-15 gpm	7.57-56.8 lpm
Auxiliary hydraulic pressure	3,000 psi	207 bar
Tires, standard size	13 x 24 in, 12 ply	

Power

Power source	Deutz 3.6TCD turbo charged diesel, Tier 4 99 hp (74 kW) *	
	Perkins 854E turbo charged diesel, Tier 4 99 hp (74 kW)	
	Perkins 1104D turbo charged diesel, Tier 3 99 hp (74 kW) **	
Electrical system	System voltage 12 volt	
Alternator	Perkins 854 - 120amps, Perkins 1104 - 95amps, Deutz 3.6TCD - 95amps	
Battery	1000 CCA at 0°F (-18°C)	
Hydraulic tank capacity	40 gal	151 L
Hydraulic system capacity (w/tank)	50 gal	189 L
Fuel tank capacity	35 gal	132 L

Weight***

	22,600 lbs	10,251 kg
--	------------	-----------

Standards Compliance

ANSI/ITSDF B56.6, CSA B335



* Also available as Tier 3 in limited regions.

** Availability limited by region and country standards.

*** Weight will vary depending on options and/or country standards.

**** Load ratings vary depending on attachment.

Load Chart GTH™-844****

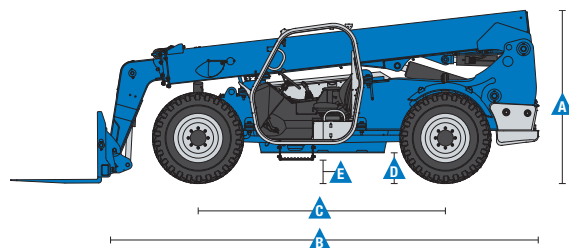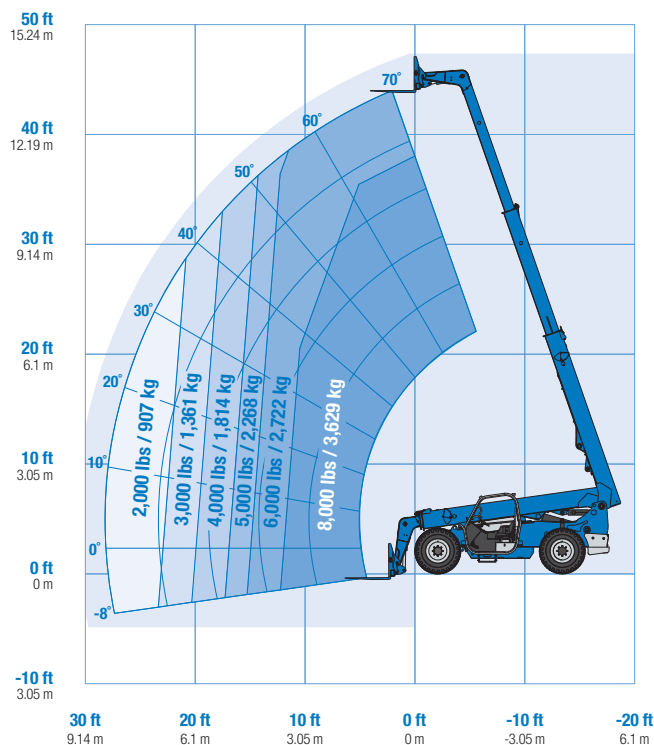

Features

Standard Features	Options & Accessories	Options & Accessories
Measurements 8,000 lb (3,629 kg) maximum lift capacity 43 ft 10 in (13.36 m) maximum lift height 28 ft 2 in (8.59 m) maximum reach Productivity - Full time 4WD 4WS - Operator selectable front, crab, coordinated steering modes 3-speed forward and reverse powershift transmission - Proportional frame leveling 10° each side - Power assisted steering - Inboard wet disc service brakes - Wet disc spring applied parking brake 13 x 24 in 12-ply air filled rough terrain tires - Front axle differential lock - High efficiency/variable displacement hydraulic pump - ROPS/FOPS canopy (ISO compliant) - Single, multi-function, proportional joystick - Machine level indicator - Full gauge cluster with engine diagnostics - Right-side screen standard on open cab - Genie manual Quick-Attach™ system - Retractable 3 in (8 cm) seatbelt 48 in carriage and pallet forks - Boom angle indicator 10 micron hydraulic return filter 1,000 cold cranking amps at 0° F (-18° C) - Reverse motion alarm - Adjustable suspension seat - Auxiliary hydraulic circuit (15 GPM)	Productivity - Fully enclosed cab (includes full glass, defroster, wiper, right-side sliding window, split door, washer) - Fully enclosed cab with air conditioning - Dual joystick controls - Flashing beacon - Work lights (2 cab front mounted, 1 back-up, 1 stop/tail) - Road lights (2 cab front mounted, 1 back-up, 2 rear stop/turn/tail) - Fire extinguisher - Front and top glass - Fenders (set of 4) Engine Options - Deutz 3.6TCD turbo charged diesel, Tier 4i 99 hp (74 kW) * - Perkins 854E turbo charged diesel, Tier 4i 99 hp (74 kW) - Perkins 1104D turbo charged diesel, Tier 3 99 hp (74 kW) ** - Engine block heater Tire Options 13 x 24 in 12-ply foam-filled rough terrain tires - Firestone upgrade option	Attachment Options - Carriages 60 in (1.52 m) carriage 72 in (1.83 m) carriage 48 in (1.22 m) rotating carriage (10° from center left and right) 60 in (1.52 m) rotating carriage (10° from center left and right) - Forks 60 in (1.52 m) pallet forks (set of two) 2 x 4 x 60 in (.05 x .10 x 1.52 m) 72 in (1.83 m) pallet forks (set of two) 2 x 4 x 72 in (.05 x .10 x 1.83 m)



* Also available as Tier 3 in limited regions.

** Availability limited by region and country standards.

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:

Effective Date: January, 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2014 Terex Corporation.