



Snorkel ATB60

- 4'6" articulated jib boom
- Fully proportional ramp-on control for drive
- Variable speed controlled boom functions
- Automatic braking
- Foam filled tires
- Zero tailswing with boom elevated
- 180 degrees hydraulic platform rotation
- 12 volt battery operated emergency power
- Swing out battery trays
- Battery condition indicator
- Low battery voltage interrupt
- Driveable at full height
- 5 degrees tilt alarm
- 125 volt GFCI AC outlet at platform
- Hour meter
- Keyed master switch
- Lifting and tie down lugs
- Fork lift tubes
- Operator horn
- 60 month warranty



Specifications	
Working Height	66' (20.1 m)
Platform:	
Height	60' (18.3 m)
Capacity	500 lbs (227 kg)
Size	60" x 30" (152 x 76 cm)
Construction	Steel
Boom Construction:	
Riser and Main Booms	Steel
Telescoping & Jib Booms	Steel/Aluminum*
Boom Extension	Double acting hydraulic cylinder
Boom Guides	Lubrication free, ultra high molecular weight polyethylene
Pivot Pin Bearings	Lubrication free, composite material
Horizontal Reach	43'1" at 19'3" (13.1 m at 5.9m)
Hose & Wiring Extension	Telescoping housing attached to sides of booms
Turntable Rotation	360 degrees continuous
Power Source	Gas (LP or Dual Fuel optional) or Diesel Engine
Fuel Capacity	40 US gal (151.4 L)
Hydraulic System Capacity	35 US gal (132.5 L)
Drive Speeds :	
High (booms stowed)	3.5 mph (5.6 kph)
Middle (booms stowed)	1.9 mph (3.1 kph)
Low	.75mph (1.1 kph)
Gradeability	20%
Turning Radius :	
Inside	8'1/2" (2.45 m)
Height (stowed)	8'3" (2.52 m)
Width	7'11-1/2" (2.43 m)

Length (stowed)	29'1/2" (8.88 m)
Wheelbase	8' (2.44 m)
Tires	15" x 19.5"
Type	Foam filled, 12 ply rating
Weight (approx.)	ATB60: 27,600 lbs (12,610 kg) / ATB 60 AL: 24,600 lbs (12,182 kg)

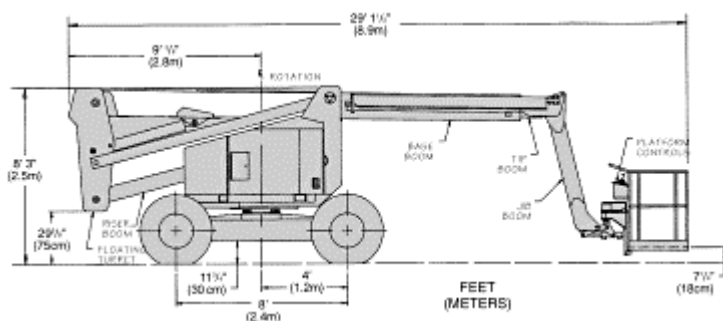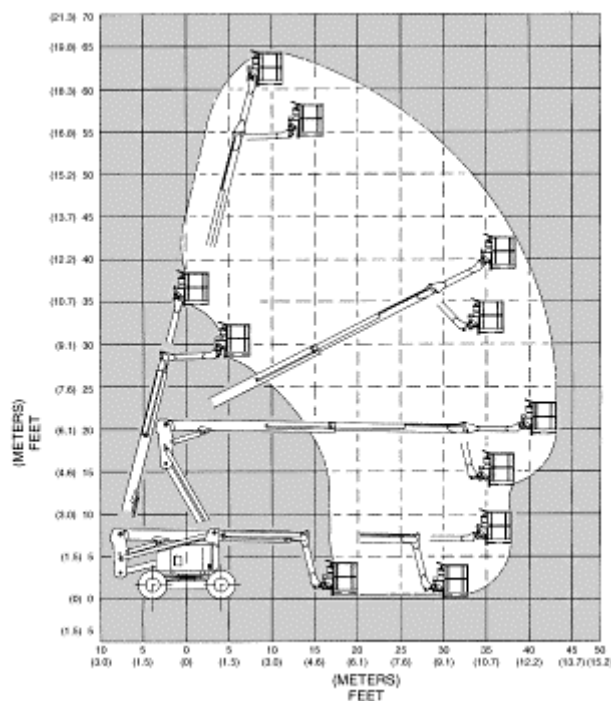

A division of FORCE CORP
FREECALL: 1800 674 777