

TSURUMI PUMP Portable Generators

TSURUMI TPG3 / TPG Series Generators are designed to withstand the severe conditions of construction jobsites or industrial applications, especially where extra durability and dependable, stable power are required. Ideal to supply the power to Tsurumi's single-phase submersible pumps and all your electrical power tools such as drills, saws, lighting and heaters.

TPG3 / TPG Series Generators Features *powered by Honda*

- High Capacity Fuel Tank with Fuel Gauge for extended run time.
- Large, Silent Muffler with USDA qualified spark arrestor to greatly reduce noise.
- Optional Wheel Kits & Lifting Bail are available.
(PGWK-200 for all TPG3 Series: Wheel Kit & Lifting Bail, PGWK-11K for TPG-11000HDXE: Wheel Kit only)


Powered by **Honda OHV engine** for efficient fuel and oil construction with oil alert system to shut off motor if oil fails below safe operating level.

Large Air Filter for **superior emission control**.

Automatic Idle Control reduces fuel consumption, noise, and engine wear.

Auto Idle Control Switch on Control Panel. (Not available on TPG3-3000HDX)

Rubber Vibration Pads isolate generator / engine set for **maximum protection and noise reduction**.

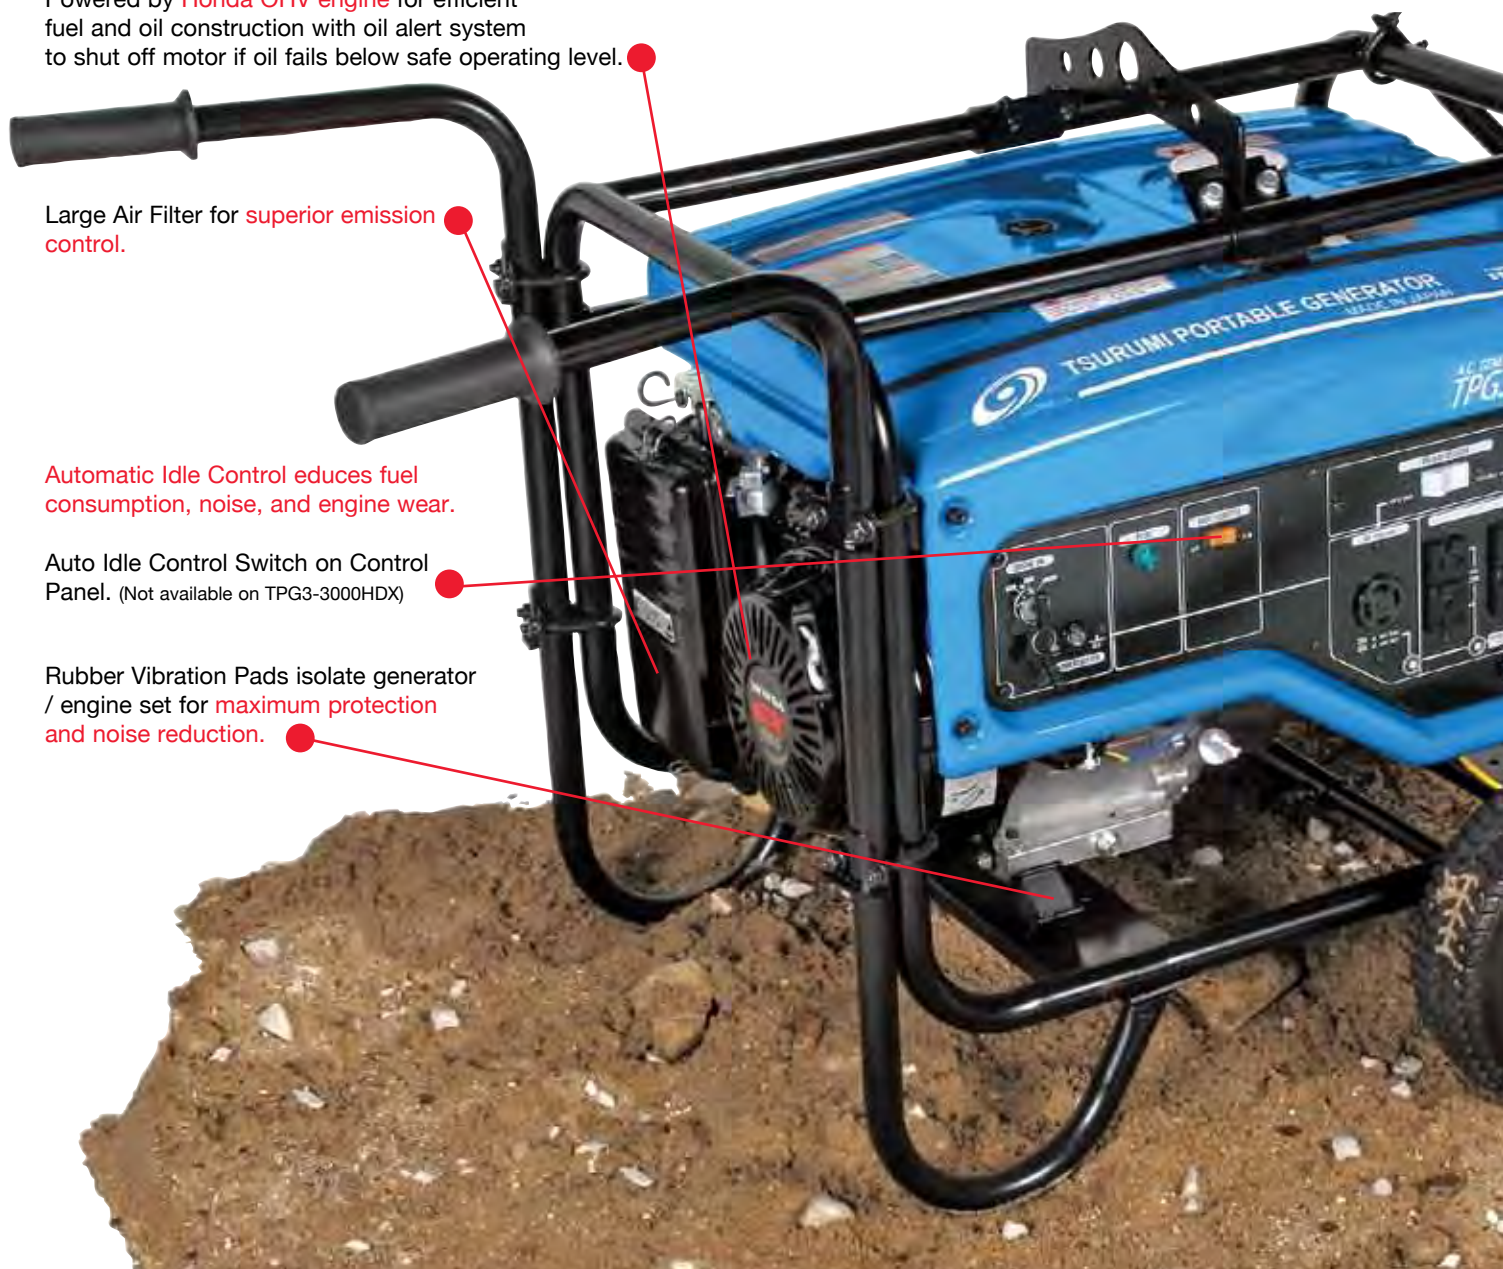

TPG3 SERIES GENERATORS



	TPG3-3000HDX	TPG3-4500HDX	TPG3-6000HDX	TPG3-7000HDX TPG3-7000HDXE
Max. / Rated Output (watts)	2900 / 2400	4500 / 3600	6000 / 5000	7000 / 6000
Max. / Rated Current (120V / 240V)	24.2/20	37.5/30, 18.8/15	50/40, 25/20	58.3/50, 29.2/25
Voltage (V) (60Hz)	120	120/240	120/240	120/240
AC Outlet Replacement	1-NEMA 5-20R Duplex (20A, 12A, W/GFCI)	2-NEMA 5-20A Duplex (20A, 12A, W/GFCI) 1-NEMA L5-30R (30A, 120V, Twist Lock) 1-NEMA L14-20R (30A, 120/240V, Twist Lock)	2-NEMA 5-20A Duplex (20A, 12A, W/GFCI) 1-NEMA L5-30R (30A, 120V, Twist Lock) 1-NEMA L14-20R (30A, 120/240V, Twist Lock)	
Engine Model	GX160	GX240	GX340	GX390
Maximum HP	5.5 (3600RPM)	8.0 (3600RPM)	11.0 (3600RPM)	13.0 (3600RPM)
Displacement	163 (10inch ³)	242 (15inch ³)	337 (21inch ³)	389 (24inch ³)
Fuel Tank Capacity (gallon)	6.6	6.6	6.6	6.6
Running Time (Rated load, 1/2 load)	11.9/16.6	11.4/16.4	8.5/12.2	7.9/11.8
Starting System	Recoil	Recoil	Recoil	Recoil (HDX), Electric (HDXE)
Noise Level (Rated Load)	64dB	68dB	72dB	78dB
Shipping Size (LxWxH) (inches)	23 5/8x16 1/2x19 3/4	27 3/16x21 1/4x20 1/4	27 3/16x21 1/4x20 1/4	27 3/16x21 1/4x20 1/4
Shipping Weight (lbs.)	102	157	176	185(HDX), 191 (HDXE)



TPG-11000HDXE GENERATOR

	TPG-11000HDXE
Rated Output (1ph)	10.5 kVA
Max. Output (1ph)	11.5 kVA
Alternator	AVR
Frequency (Hz)	60
Phase	Single
Armature Connection	-
Power Factor	1.0
Receptacle (amperage rating and plug types)	2-NEMA 5-20R Duplex (20A, 120V, W/GFCI) 1-NEMA L5-30R (30A, 120V, Twist Lock) 1-NEMA L14-30R (30A, 120/240V Twist Lock) 1-NEMA L14-50R (50A, 120/240V Twist Lock)
Fuel Tank Capacity (gal.)	9.75
Engine	Honda GX630
Displacement of Engine	688 cc
HP @ rated speed	20.2HP
Emission	-
Noise Level (dB)	75 (reference data)
L x W x H (inch)	38.2 x 26.7 x 28.6
Weight (lbs.)	433

*Specification subject to change *Wheel Kit is optional