


Rol-Air


8 HP SINGLE STAGE TWO CYLINDER PORTABLE GAS COMPRESSORS

ASSOCIATE
ENGINEERING
CORPORATION

P.O. BOX 346 606 S. LAKE ST.
HUSTISFORD, WI 53034-0346
PHONE: (920) 349-3281 Fax: 920.349.3691

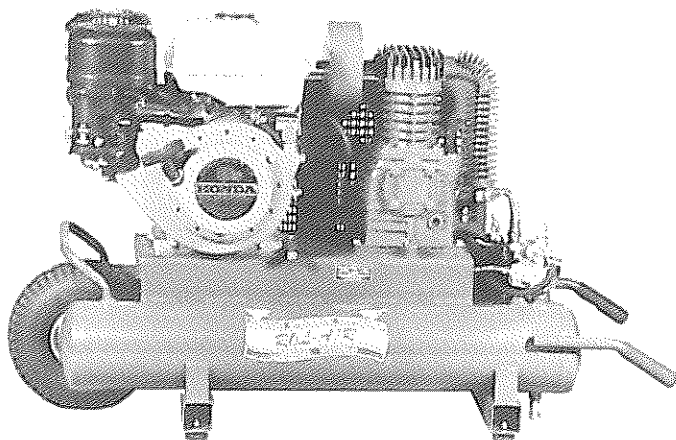

MODEL 1040HK17

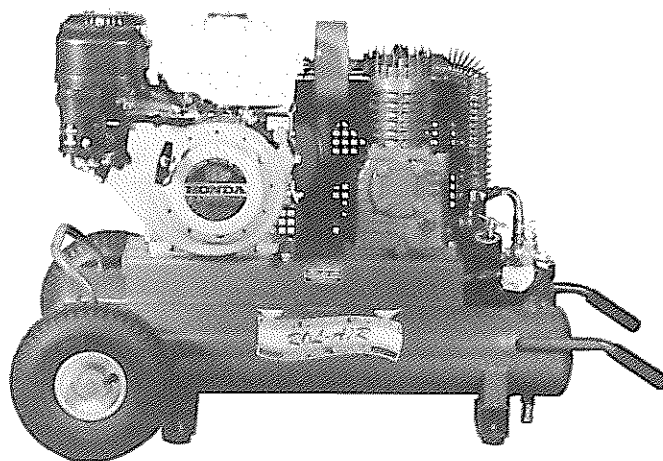

MODEL 2040HK17

"ROL-AIR" STANDARD FEATURES

PUMP: Heavy Duty Single Stage Compressor with Cast Iron Twin Cylinders, Ball Bearings, Splash Lubricated, Aluminum Alloy Connecting Rods with Inserts, Swedish Lamellar Reed Valves, Cast Iron Flywheel and Valve Plates, Oil Sight Gauge.

ENGINE: 8 HP, Honda 4 Cycle, Complete Aluminum Alloy With Cast Iron Sleeve, Overhead Valves, Retractable Starter, On/Off Switch, Splash Lubricated, Low Oil Shutdown

PERFORMANCE @ 100 P.S.I.

Cu. Ft. Displ. - 14.4

Cu. Ft. Free Air - 9.4

DIMENSIONS

Model 1040HK17 - L46" x W19" x H29"

Model 2040HK17 - L46" x W27" x H29"

TANK: Non-Code, 9 Gallons

WHEELS: 410/350 x 4, 2 Ply Fully Pneumatic
Model 1040HK17 - One Wheel
Model 2040HK17 - Two Wheels

SHIPPING WEIGHT

Model 1040HK17 - 230 lbs.

Model 2040HK17 - 240 lbs.

STANDARD EQUIPMENT

- Pressure Gauge - 0-200 in 5 lb. Graduations
- Automatic Pilot Valve Operation
- Industrial Flexible Discharge Hose
- Accessories Support Clip
- Aftercooler
- Quick Disconnect Fitting
- Safety Relief Valve
- Totally Enclosed Belt Guard
- Automatic Engine Throttle for Economy and Long Service Life
- Schmidt Belt Tightening Device

OPTIONAL EQUIPMENT

Filter-Regulator-Lubricator Sets,
Kohler and Robin Engines



PB0137K

8/99

